

LOW-HEADROOM FRONT MOUNT TRACK

Track Assembly:

- 12 Ga. 304 Stainless Steel - Full Angle Mount
- 11 Ga. Galvanized Steel - Clip Angle Mount

Track Mounting Angle:

- Inside Angle for Wood, Steel or Aluminum
- Outside Angle for Wood
- Outside Angle for Masonry or Steel

Shaft: Solid Keyed

- 304 Stainless Steel
- Galvanized Steel

Drums:

- Cast Aluminum
- Specialty Coating

Bearings: Sealed Greaseable


- Stainless Steel
- Painted Cast Iron

Torsion Springs:

- 302 Stainless Steel
- Galvanized Steel

NOTE:

Spring size and configuration individually calculated to counterbalance door load. An exact spring layout can be furnished upon approval of bid. Some doors may require more than 2 springs

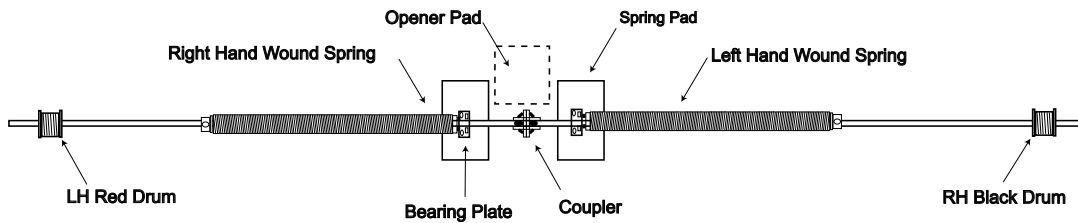

RECOMENDED MINIMUMS


Spring Pad - By Others:

(Pads must be flush with jambs)

- Metal - 8"W x 12"H x 1/4"
For use with Metal jambs
- Wood - 2" x 6" LUMBER x 12"
For use with wood jambs

TORSION SPRINGS:

- 10,000 cycle
- 25,000 cycle
- 50,000 cycle
- 100,000 cycle
- OTHER _____

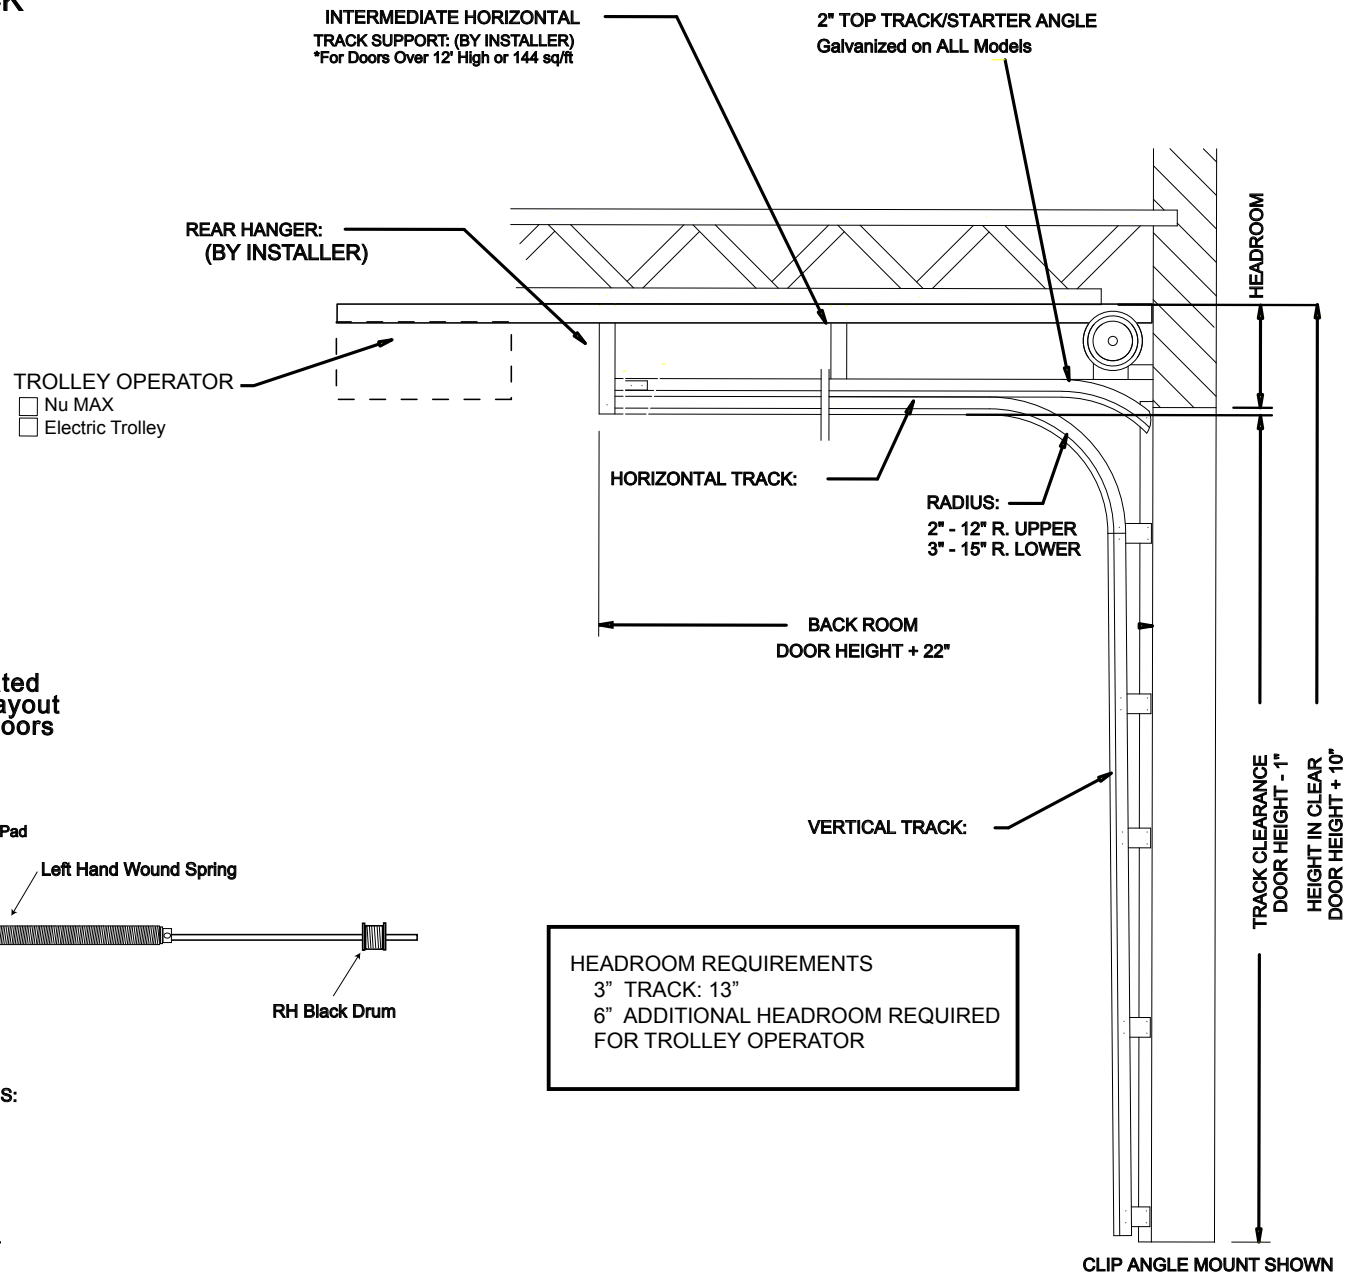

© AMGDS 2006



CUST:	
JOB #:	
ARCH:	
CONT:	

LOW-HEADROOM FRONT MOUNT	
OPENING SIZE:	___' ___"W x ___' ___"H
DOOR SIZE:	___' ___"W x ___' ___"H

OPERATOR MODEL :	_____
AVAILABLE HEADROOM:	_____

HEIGHT IN CLEAR:	_____
<input type="checkbox"/> DOOR ONLY	
<input type="checkbox"/> DOOR WITH OPENER	

LH Front
DATE: _____
BID #: _____
PAGE ___ of ___