

# VERTICAL-LIFT TRACK

- ☐ BREAKAWAY
- ☐ STRAIGHT INCLINE (OPTIONAL)  
(With Outside Drum and Bottom Bracket)

## Track Assembly:

- ☐ 12 Ga. 304 Stainless Steel - Full Angle Mount
- ☐ 11 Ga. Galvanized Steel - Clip Angle Mount

## Track Mounting Angle:

- ☐ Inside Angle for Wood, Steel or Aluminum
- ☐ Outside Angle for Wood
- ☐ Outside Angle for Masonry

## Shaft: Solid Keyed

- ☐ 304 Stainless Steel
- ☐ Galvanized Steel

## Drums:

- ☐ Cast Aluminum
- ☐ Specialty Coated

## Bearings: Sealed Greaseable


- ☐ Stainless Steel
- ☐ Painted Cast Iron

## Torsion Springs:

- ☐ 304 Stainless Steel
- ☐ Galvanized Steel

## NOTE:

Spring size and configuration individually calculated to counterbalance door load. An exact spring layout can be furnished upon approval of bid. Some doors may require more than 2 springs

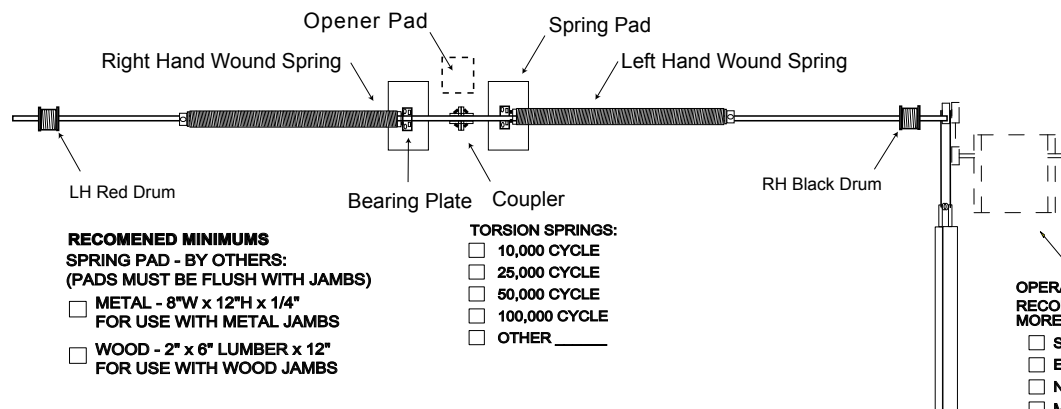

### RECOMENED MINIMUMS

SPRING PAD - BY OTHERS:  
(PADS MUST BE FLUSH WITH JAMBS)


- ☐ METAL - 8"W x 12"H x 1/4"  
FOR USE WITH METAL JAMBS
- ☐ WOOD - 2" x 6" LUMBER x 12"  
FOR USE WITH WOOD JAMBS

### TORSION SPRINGS:

- ☐ 10,000 CYCLE
- ☐ 25,000 CYCLE
- ☐ 50,000 CYCLE
- ☐ 100,000 CYCLE
- ☐ OTHER \_\_\_\_\_

### OPERATOR: RECOMENDED FOR DOORS WITH MORE THAN 12" HI-LIFT

- ☐ Supralift
- ☐ Electric Jackshaft
- ☐ NuMAX Vertical
- ☐ MagneMAX Vertical

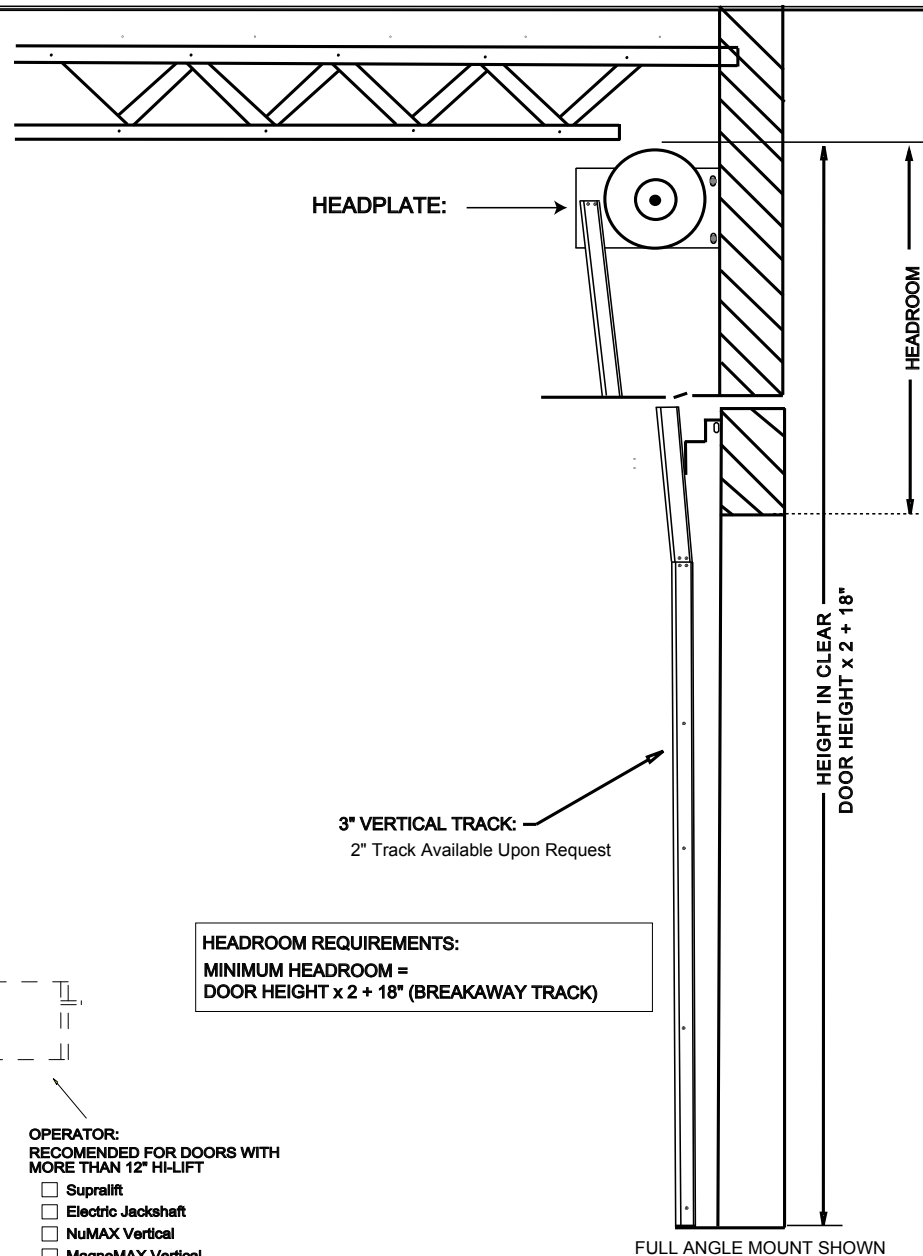

**HEADROOM REQUIREMENTS:**  
MINIMUM HEADROOM =  
DOOR HEIGHT x 2 + 18" (BREAKAWAY TRACK)

FULL ANGLE MOUNT SHOWN

© AMGDS 2006

**American**  
garage door supply inc.  
1-800-233-1487

CUST:

JOB:

ARCH:

CONT:

## VERTICAL LIFT

OPENING SIZE: \_\_\_' \_\_\_" W x \_\_\_' \_\_\_" H

DOOR SIZE: \_\_\_' \_\_\_" W x \_\_\_' \_\_\_" H

OPERATOR MODEL : \_\_\_\_\_

AVAILABLE HEADROOM: \_\_\_\_\_

OVERHEAD CLEARANCE: \_\_\_\_\_

☐ DOOR ONLY

☐ DOOR WITH OPENER

## Vertical Lift Track

DATE: \_\_\_\_\_

BID #: \_\_\_\_\_

PAGE \_\_\_ of \_\_\_