

2" LOW-HEADROOM REAR MOUNT TRACK - STANDARD

Track Assembly:

- ☐ 14 Ga. 304 Stainless Steel - Full Angle Mount
- ☐ 14 Ga. Galvanized Steel - Clip Angle Mount
- ☐ 14 Ga. 304 Stainless Steel - Bracket Mount
- ☐ 14 Ga. Galvanized Steel - Bracket Mount

Track Mounting Angle:

- ☐ Inside Angle for Wood, Steel or Aluminum
- ☐ Outside Angle for Wood
- ☐ Outside Angle for Masonry

Shaft: Solid Keyed

- ☐ 304 Stainless Steel
- ☐ Galvanized Steel

Drums:

- ☐ Cast Aluminum
- ☐ Specialty Coated

Bearings: Sealed Greaseable


- ☐ Stainless Steel
- ☐ Painted Cast Iron

Torsion Springs:

- ☐ 302 Stainless Steel
- ☐ Galvanized Steel

NOTE:

Spring size and configuration individually calculated to counterbalance door load. An exact spring layout can be furnished upon approval of bid. Some doors may require more than 2 springs

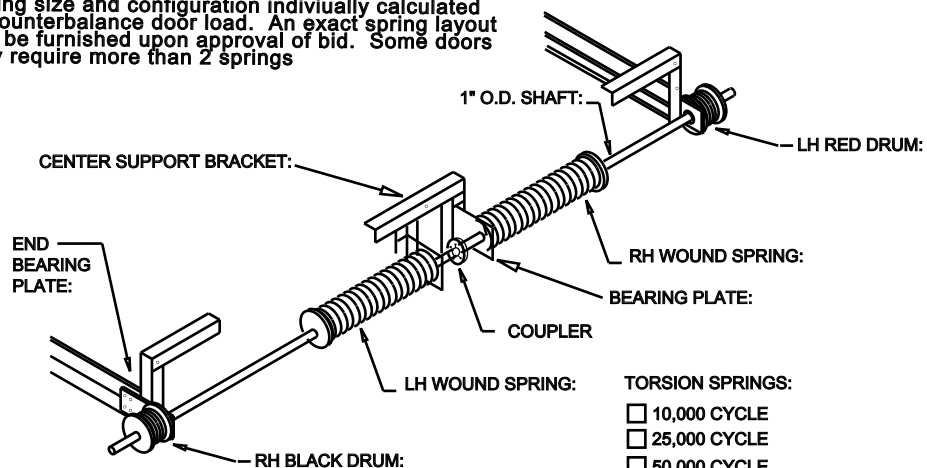

TORSION SPRINGS:

- ☐ 10,000 CYCLE
- ☐ 25,000 CYCLE
- ☐ 50,000 CYCLE
- ☐ 100,000 CYCLE
- ☐ OTHER _____

BACK HANG:
(BY INSTALLER)

INTERMEDIATE HORIZONTAL
TRACK SUPPORT: (BY INSTALLER)
*For Doors Over 12' High or 144 sq/ft

STARTER ANGLE / TOP TRACK
* 2" Galvanized on ALL Models

TROLLEY OPERATOR:

- ☐ Nu MAX
- ☐ Magne MAX
- ☐ Electric Trolley

HORIZONTAL TRACK:

RADIUS:
2" - 12" R. GALV. UPPER
2" - 15" R. GALV. LOWER
2" - 14" R. SS UPPER
2" - 14" R. SS LOWER

BACK ROOM
DOOR HEIGHT + 24"

2" VERTICAL TRACK:

HEADROOM REQUIREMENTS
2" TRACK: 4-1/2"
ADDITIONAL HEADROOM FOR
TROLLEY OPERATOR

CLIP ANGLE MOUNT SHOWN

© AMGDS 2006

American
garage door supply inc.
1-800-233-1487

CUST: _____

JOB #: _____

ARCH: _____

CONT: _____

LOW-HEADROOM REAR MOUNT

OPENING SIZE: ____' ____"W x ____' ____"H

DOOR SIZE: ____' ____"W x ____' ____"H

OPERATOR MODEL : _____

AVAILABLE HEADROOM: _____

HEIGHT IN CLEAR: _____

☐ DOOR ONLY

☐ DOOR WITH OPENER

LH Track Rear

DATE: _____

BID #: _____

PAGE ____ of ____