

-Specifications-

Doors Shall Be Sectional Overhead Type As Manufactured By American Garage Door Supply Inc.

1. Door Sections- Survivor Polycarbonate

Glazing-

5/8" Five X-Wall, Clear Polycarbonate With U.V Absorber.

Frame-Rails And Stiles- Heavy Duty Extruded Aluminum Meeting Rails To Be Of Tongue And Groove Design For Weathertight Closure with Beveled Rails To Eliminate Moisture Accumulation.

Bottom Rail- Full-Width Bottom Rail Includes Aluminum Retainer And Vinyl Astragal.

Finish- Aluminum Stiles And Rails To Have Clear Mill Finish.

2. Door Hardware- Silver Model

Hinges- 11ga. Galvanized Steel.

Galvanized Steel Hinge Fasteners.

Rollers- Magnum Type With Stainless Steel Stems, Sealed Bearings And Polyethylene Tire.

Lifting Cable- To Be Constructed Of Stainless Steel For Corrosion Resistance.

Lock- Spring Loaded Slide Bolt Engages Slot In Track- Operable From Inside Only.

-Section Options-



Full Vision Sections- include full view section with double-wall acrylic glazing in intermediate section. Qty _____ per door



Conveyor Cut-out- Provide conveyor cut-out on bottom section per equipment requirements.



Transom Door- Provide egress transom door through overhead door.



Dummy Section- Provide dummy section for installation of drawbar opener.



Powderpaint Finish- All Stiles and rails to have powderpaint finish per architects specifications.




Anodized Finish- All Stiles and rails to have anodized finish per architects specifications.



Exhaust Ports
Location _____ Size _____


Exterior Polycarbonate Section Elevation

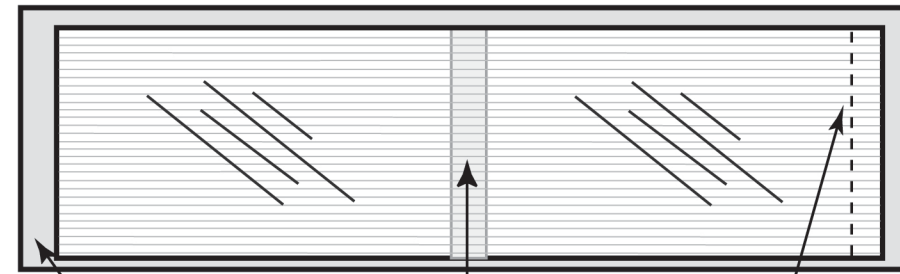

Aluminum Alloy Frame

Number and arrangement of center stiles dependant upon width of door.

Double end styles req'd on doors over 14' Width

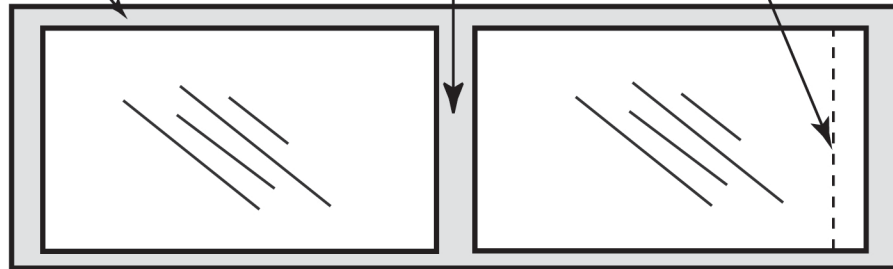

Exterior Full Vision Section Elevation

Standard Number of Center Stiles Per Section

8'	10'	12'	14'	16'	18'	20'	24'
1	1	2	2	3	3	3	4

Special Number of Stiles



Notice

This drawing must be approved and returned to the door contractor before the order will be entered into production. American Garage Door Supply will not be responsible for opening sizes or required clearances unless complete plans are submitted with shop drawings request. Plans must be retained by American Garage Door Supply until the project is complete. Doors and related products are subject to the prices in effect at the time the shop drawings are received for production at American Garage Door Supply Inc.

Tongue and Groove Meeting Rails

Double Panel Seal

5/8" Five-X Wall Polycarbonate with Multiple Air Barrier

End Stile Not Shown

2" Thick Stiles and Rails

Between Section Seal

Polycarbonate Section Side Elevation



Shop Drawing

American Garage Door Supply Inc.
1225 Industrial Park Dr.
Bemidji, MN. 56601

1-800-233-1487

Job: _____

Location: _____

Contractor: _____

Architect: _____

Distributor: _____

Date: _____

Sheet _____ of: _____

Drawn By: _____

Scale: _____ None _____